

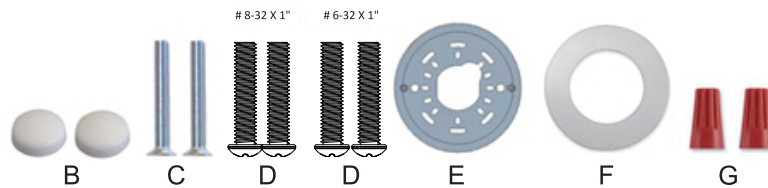


VSL90 Quick Installation Guide.

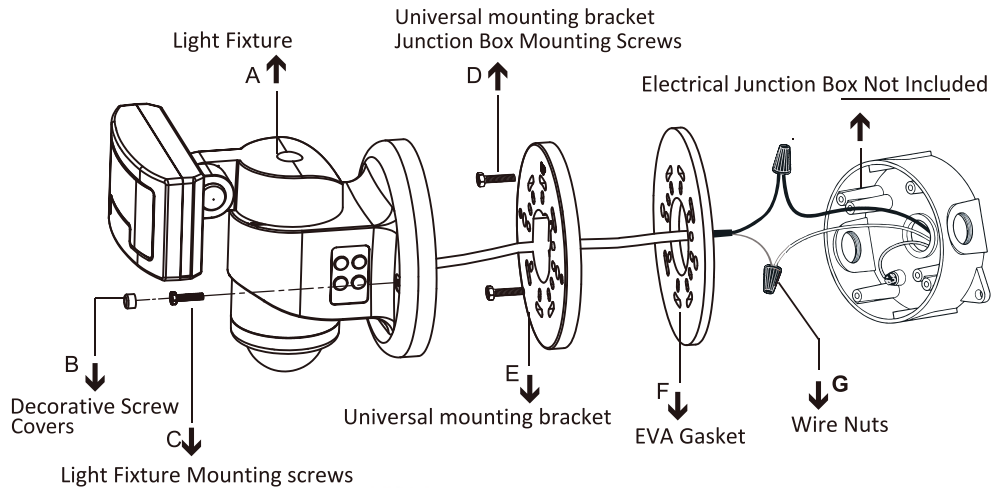


①

Switch off the power before installing the fixture




②

Select installation area and install between 6.6 ft / 2 meters - 10 ft / 3 meters above the ground



③

Feed the fixture black and white wires through the Universal mounting bracket and through the EVA gasket before connecting inside the junction box.

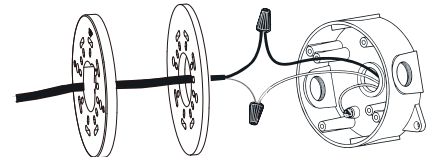


④

Use the Wire Nuts and connect the wires inside the junction box :


Black to Black (Live)
White to White (Neutral)

Note: An earth or ground wire is not required as the fixture is double insulated in design.

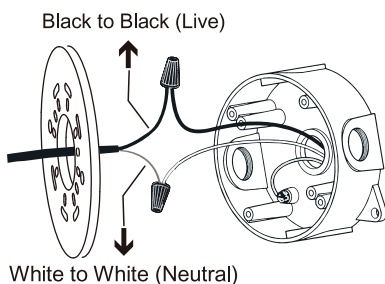


⑤

Align the EVA gasket and Universal mounting bracket onto the junction box and tighten with the junction box screws. Lastly align and mount the Light fixture onto the universal mounting bracket and cover the screw heads with the decorative screw covers.

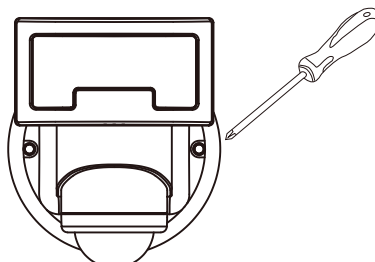

⑥

Switch the power back on to the fixture. A noticeable green LED light will flicker on and off for 1 minute inside the sensor lens that indicates the warm up process. On completion the green LED light will become stable. The fixture has a built-in photocell to automatically become functional and active during dusk /night time .To do a walk test after installation, push theSW4 button and hold for 2 seconds – The LED light will turn on and rotate towards sensor detection and after 3 minutes the LED light will automatically turnoff and become active during night/ dusk time operations.

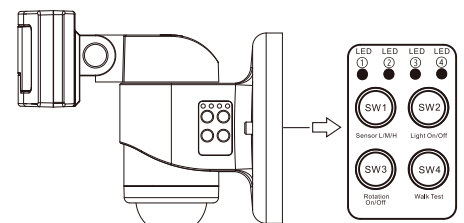

Green Indicator LED Light